

01/08/98

JCS35 U.S. PTO



A

Please type a plus sign (+) inside this box → ☐
 PTO/SB/05 (12/97)  
 Approved for use through 09/30/00. OMB 0651-0032  
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

CT-269

Total Pages

41

First Named Inventor or Application Identifier

Larry Tu, et al.

Express Mail Label No.

EM266118575US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 37]  
(preferred arrangement set forth below)
- Descriptive title of the invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the invention
  - Brief Summary of the invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 4]
4. ☐ Oath or Declaration [Total Pages 0]
- a. ☐ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
(Note Box 5 below)
  - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a  
copy of the oath or declaration is supplied under Box 4b,  
is considered as being part of the disclosure of the  
accompanying application and is hereby incorporated by  
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations
12. ☐ Preliminary Amendment
13. ☐ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☐ Other: .....

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_/\_\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

NAME	Kenneth D'Alessandro			
	D'Alessandro & Ritchie			
ADDRESS	P. O. Box 640640			
CITY	San Jose	STATE	CA	ZIP CODE 95164-0640
COUNTRY	U.S.A.	TELEPHONE	408-441-1100	FAX 408-441-8400

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:	) Art Unit:
Tu, et al.	) Examiner:
Serial No. [Not yet assigned]	)
Filed: January 8, 1998	)
For: METHOD AND APPARATUS FOR	)
PERFORMING MPEG II	)
DEQUANTIZATION AND IDCT	)


## CERTIFICATE OF MAILING

"Express Mail" mailing label no: EM266118575US

Date of Deposit: January 8, 1998

I hereby certify that this correspondence is being  
deposited with the United States Postal Service "Express  
Mail Post Office to Addressee" service under 37 CFR  
1.10 on the date indicated above and is addressed to:

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

  
Diane Morse

## TRANSMITTAL LETTER

Honorable Assistant Commissioner  
for Patents  
Box Patent Application  
Washington, D.C. 20231

Dear Sir:

Enclosed for filing please find the patent application for an invention entitled,  
"METHOD AND APPARATUS FOR PERFORMING MPEG II DEQUANTIZATION  
AND IDCT", filed on behalf of Chips and Technologies, assignee from inventors Larry  
Tu, Jane Liu, Jack Ouyang, Xiaoping Hu, Roger Hsu, including Utility Patent Application

Transmittal, 25 pages of specification, 11 pages of claims, 4 sheets of drawing figures, and 1 page of Abstract.


The attorney's Docket Number is CT-269.

Kindly address all communications regarding this application to:

Kenneth D'Alessandro  
D'Alessandro & Ritchie  
P.O. Box 640640  
San Jose, CA 95164-0640  
Telephone (408) 441-1100

No fee is being paid at this time.

Respectfully submitted,  
D'ALESSANDRO & RITCHIE



---

David B. Ritchie  
Reg. No. 31,562

Dated: January 8, 1998

D'Alessandro & Ritchie  
P.O. Box 640640  
San Jose, CA 95164-0640  
(408) 441-1100

This application is submitted in the name of Inventors Larry Tu, Jane Liu, Jack Ouyang, Xiaoping Hu, Roger Hsu, assignors to Chips and Technologies, a Delaware Corporation.

## SPECIFICATION

### METHOD AND APPARATUS FOR PERFORMING MPEG II DEQUANTIZATION AND IDCT

#### BACKGROUND OF THE INVENTION

##### 1. Field of the Invention

The present invention relates to a method and apparatus for operating a video decoder at an increased rate of speed. More particularly, the present invention relates to a method and apparatus for performing dequantization and Inverse Discrete Cosine Transform (IDCT) on video signal data in a video decoder at a rate of speed compatible with a 30 frame per second motion picture quality.

##### 2. The Background Art

Graphics and video processing are operation intensive. At the same time, high-speed processing is particularly important in the areas of video processing, image compression and decompression. Furthermore, with the growth of the "multi-media" desktop, it is imperative that computer systems accommodate high-speed graphics, video

processing, and image compression/decompression to execute multimedia applications. Accordingly, it would be desirable if a video decoder were designed to maintain a speed compatible with a 30 frame per second motion picture quality.

Video decoding includes the steps of dequantization, IDCT, motion  
 5 compensation, and color space conversion. Each picture, or frame, processed by the video decoder comprises a plurality of macroblocks, each of which further comprise a plurality of blocks of encoded video signal data. Dequantization is performed on each block of encoded video signal data, and produces an 8x8 matrix corresponding to each block. Since IDCT typically includes multiplication of each of these 64 dequantization  
 10 values by a cosine matrix, the IDCT process is particularly time-consuming, and a bottleneck of the speed of the decoder.

The speed of the decoder is limited by the speed of the IDCT process. Typically, as many as 10 multiplications are required to complete one IDCT row or column calculation. For a resolution of 640x480, the number of blocks in each frame to be  
 15 processed for a 4:2:0 format is 7200. Thus, the total number of calculations required to process one frame is  $10 * (8 + 8) * 7200 = 1,152,000$ . Clearly, the number of calculations performed during the IDCT process substantially limits the speed of the decoder.

20 According to current standards, it would be desirable to maintain the quality of the decoder at 30 frames per second as required for the motion picture quality.

Therefore, it would be beneficial if the speed of the IDCT process could be increased, thereby speeding up the decoding process. A need exists in the prior art for a method for performing the IDCT calculations at an increased rate of speed through reducing the number of IDCT calculations required.

5

### BRIEF DESCRIPTION OF THE INVENTION

The present invention provides an improved method and apparatus for performing dequantization and IDCT calculations in an MPEG-II decoder. A dequantization block is provided for performing dequantization calculations on a block of encoded video signal data using a modified standard quantization matrix. The modified standard quantization matrix is a product of a standard quantization matrix and a diagonal cosine matrix. An IDCT block is provided for performing IDCT calculations on each block processed by the dequantization block. Through combination of the standard quantization and diagonal cosine matrices prior to the IDCT process, the number of operations required during the IDCT process is substantially reduced.

The dequantization block receives a modified standard quantization matrix, the modified standard quantization matrix being a product of a standard quantization matrix corresponding to the encoded video data stream and a diagonal cosine matrix. In addition the dequantization block receives a scale representing a compression ratio of

the encoded video data stream and non-zero IDCT coefficient matrix corresponding to a block of the encoded video data. The dequantization block then multiplies the scale, the non-zero IDCT coefficient matrix and the modified standard quantization matrix to produce dequantization video signal data.

5           The IDCT block receives each block of processed data from the dequantization block. The IDCT block then performs IDCT row and column calculations on the dequantization video signal data according to a set of IDCT butterfly operations.

10           The present invention includes a dequantization block and an IDCT block which operate in parallel to maximize the speed of the MPEG-II decoder. Through the movement of multiplication of a cosine matrix typically performed during the IDCT process to the prior dequantization step, the remaining steps in the IDCT process are recombined to reduce the total number of operations required by the IDCT block. As a result, the total number of operations performed during decoding is substantially reduced, and the speed of the decoding process is correspondingly increased.

#### 15           BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram illustrating data flow of encoded input data through a dequantization and IDCT block according to a presently preferred embodiment of the present invention.

Figure 2 illustrates a dequantization data path according to a presently preferred embodiment of the present invention.

Figure 3 illustrates control and data flow in an IDCT block according to a presently preferred embodiment of the present invention.

5 Figure 4 illustrates an IDCT data path according to a presently preferred embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following description, a preferred embodiment of the invention is described with regard to preferred process steps and data structures. However, those skilled in the art would recognize, after perusal of this application, that embodiments of the invention may be implemented using a set of general purpose computers operating under program control, and that modification of a set of general purpose computers to implement the process steps and data structures described herein would not require undue invention.

15 The present invention uses a parallel architecture to implement the dequantization and IDCT blocks. Each MB comprises 6 blocks, each 8x8 block comprising 64 data. Thus, each of these blocks is processed in parallel by the dequantization and IDCT blocks. Through combining the quantization matrix with a diagonal cosine matrix prior to the dequantization calculations, the number of multiplications required by the IDCT



process to complete one row or column calculation is reduced to 5. As a result, the present invention increases the throughput of the IDCT process, resulting in a substantial increase in processing speed.

Referring now to FIG. 1, a block diagram illustrates the parallel operation of a dequantization block 10 and IDCT block 12 according to a presently preferred embodiment of the present invention. Each block of data is obtained from the data stream via a command queue block 14 and processed. When a system reset, or start decoding signal, is received from the command queue block, both a first memory 16 and a second memory 18 are initialized to zeros. When the data from the command queue block 14 is ready, the dequantization block 10 and IDCT block 12 simultaneously process each block of data. According to a presently preferred embodiment of the present invention, the dequantization block 10 stores dequantization data to the first 16 or second memory 18, while the IDCT block 12 stores intermediate IDCT data (i.e., row or column IDCT data) to the other memory. When the dequantization block 10 and IDCT block 12 have completed processing the block of data, each sends a signal to a motion compensation block 20. The final IDCT data is stored to a third memory 22 for use by the motion compensation block 20, or is sent directly to the motion compensation block 20.

The command queue block 14 fetches commands and encoded input data in frame buffer memory, decodes the commands and dispatches the data to the dequantization block 10 and IDCT block 12. The command queue block 14 processes

encoded input data 24 and outputs command queue output data comprising a non-zero IDCT coefficient 26 with corresponding index 28 which determines the location of the IDCT coefficient 26 in the block, and a scale 30 representing a compression ratio of the encoded input data. The command queue output data is then sent to the dequantization

5 block 10. The index 28 transfers only non-zero IDCT coefficients from the command queue block 14 to the dequantization block 10. Therefore, only non-zero coefficients are dequantized. For timing purposes, the index 28 is used by the dequantization block 10 to store intermediate data in the first 16 and second 18 memories. According to a presently preferred embodiment, the IDCT coefficient 26 comprises 12 bits, the index 28

10 comprises 6 bits, and the scale 30 comprises 7 bits. In addition, the command queue block 14 outputs a modified standard quantization matrix 32 ( $DTD^t$ ) depending upon the encoded input data stream. For example, if the input data comprises intra blocks, a standard quantization matrix T is used which is different from that used if the input data comprises non-intra blocks. The modified standard quantization matrix 32 is stored for

15 use by the dequantization block. The modified standard quantization matrix 32 comprises  $DTD^t$  where D is diagonal matrix

20

C4, 0, 0, 0, 0, 0, 0, 0
0, C1, 0, 0, 0, 0, 0, 0
0, 0, C2, 0, 0, 0, 0, 0
0, 0, 0, C3, 0, 0, 0, 0
0, 0, 0, 0, C4, 0, 0, 0
0, 0, 0, 0, 0, C5, 0, 0
0, 0, 0, 0, 0, 0, C6, 0
0, 0, 0, 0, 0, 0, 0, C7

25 and T is the standard quantization matrix. For example, a default matrix for intra blocks

is as follows:

5      8 16 19 22 26 27 29 34  
       16 16 22 24 27 29 34 37  
       19 22 26 27 29 34 34 38  
       22 22 26 27 29 34 37 40  
       22 26 27 29 32 35 40 48  
       26 27 29 32 35 40 48 58  
       26 27 29 34 38 46 56 69  
       27 29 35 38 46 56 69 83

10    A default matrix for non-intra blocks is as follows:

15    16 16 16 16 16 16 16 16  
       16 16 16 16 16 16 16 16  
       16 16 16 16 16 16 16 16  
       16 16 16 16 16 16 16 16  
       16 16 16 16 16 16 16 16  
       16 16 16 16 16 16 16 16  
       16 16 16 16 16 16 16 16  
       16 16 16 16 16 16 16 16

The modified standard quantization matrix 32 DTD<sup>t</sup> is equivalent to TDD<sup>t</sup>, where DD<sup>t</sup> is  
 20 cosine matrix:

25    C4\*C4, C4\*C1, C4\*C2, C4\*C3, C4\*C4, C4\*C5, C4\*C6, C4\*C7  
       C1\*C4, C1\*C1, C1\*C2, C1\*C3, C1\*C4, C1\*C5, C1\*C6, C1\*C7  
       C2\*C4, C2\*C1, C2\*C2, C2\*C3, C2\*C4, C2\*C5, C2\*C6, C2\*C7  
       C3\*C4, C3\*C1, C3\*C2, C3\*C3, C3\*C4, C3\*C5, C3\*C6, C3\*C7  
       C4\*C4, C4\*C1, C4\*C2, C4\*C3, C4\*C4, C4\*C5, C4\*C6, C4\*C7  
       C5\*C4, C5\*C1, C5\*C2, C5\*C3, C5\*C4, C5\*C5, C5\*C6, C5\*C7  
       C6\*C4, C6\*C1, C6\*C2, C6\*C3, C6\*C4, C6\*C5, C6\*C6, C6\*C7  
       C7\*C4, C7\*C1, C7\*C2, C7\*C3, C7\*C4, C7\*C5, C7\*C6, C7\*C7

where  $C_i = \cos(i\pi/16)$ , where  $i = 0, 1, 2, 3, 4, 5, 6, 7$

The dequantization block 10 multiplies the modified standard quantization matrix 32 by the scale 30 and the non-zero IDCT coefficient matrix 26 to produce output data comprising  $DYD^t$  where  $Y$  = the non-zero IDCT coefficient matrix produced by the command queue block \* SCALE \* T, where T is the standard quantization matrix. A maximum of  $64 \times 2 = 128$  clock cycles are required for the dequantization block 10 to process one block of data, since only non-zero IDCT coefficients are processed. One of ordinary skill in the art, however, will appreciate that the modified standard quantization matrix 32 may be generated during the dequantization process rather than prior to the dequantization process. According to a presently preferred embodiment of the present invention, the first 16 and second 18 memories comprise a 64x15 RAM.

The IDCT block 12 processes blocks of data simultaneously with the dequantization block 10. The IDCT block 12 processes a block which has been processed by the dequantization block 10 and stored in either the first 16 or the second 18 memory. The IDCT block 12 then outputs IDCT data to the motion compensation block 20. According to a presently preferred embodiment of the present invention, when the IDCT block 12 performs the IDCT calculations, it zeros the first memory 16 or the second memory 18 and stores the final IDCT data to the third memory 22 for use by the motion compensation block 20. However, those of ordinary skill in the art will readily recognize that the final IDCT data may be sent directly to the motion

compensation block 20. A data\_ready signal is then sent to the motion compensation block, which issues a done\_read signal when it is ready to receive new data. According to a presently preferred embodiment of the present invention, the third memory comprises a 64x9 RAM. Data is sent to the DQ and IDCT blocks every two cycles if the clock is faster than 50 MHz. Otherwise, the data is sent every clock cycle. However, those of ordinary skill in the art will readily recognize that data may be sent at various rates.

### Dequantization

Referring now to FIG. 2, a dequantization data path according to a presently preferred embodiment of the present invention is shown. The dequantization data path is used to multiply a selected non-zero IDCT coefficient corresponding to the index, the scale, and the corresponding element of the modified standard quantization matrix. A first multiplexer 34 having a select line 36 operatively coupled to the macroblock type of the encoded data, a first data input 38 operatively coupled to a sign(din) corresponding to the sign of the IDCT coefficient din sent by the command queue block, and a second data input 40 operatively coupled to a zero input, produces an output 42. When the mblock type of the encoded data is non-intra blocks, the select line 36 is a 0, selecting the first data input 38. However, when the macroblock type of the encoded data is intrablocks, the select line 36 is a 1, selecting the second data input 40. When the input data is negative, the sign(din) is -1, when the input data is 0, the sign(din) is 0, and when the input data is positive, the sign(din) is 1.

A first adder 44 has a first input 46 operatively coupled to the output 42 from the first multiplexer and a second input 48 operatively coupled to  $(2 * \text{IDCT coefficient din})$ , and an output 50 operatively coupled to a first clocked flip-flop 52.

A first multiplier 54 has a first input 56 operatively coupled to the first clocked flip flop, a second input 58 operatively coupled to a portion of the modified standard quantization matrix corresponding to the index, and an output 60. The modified standard matrix is produced by multiplying the 8 bit standard dequantization matrix by the 8 bit diagonal cosine matrix. Since the standard dequantization matrix is shifted left 4 bits prior to multiplication, the output of the multiplication later needs to be shifted right 4 bits.

A second multiplexer 62 has a first input 64 operatively coupled to the output of the first multiplier, a second input 66 operatively coupled to the output from the first clocked flip-flop, a select line 68 operatively coupled to a DC\_AND\_INTRA indicator, indicating that the input data comprises intra blocks and the DCT coefficient has frequency zero in both dimensions, and an output 70 operatively coupled to a second clocked flip-flop 72. If the select line of the second multiplexer 68 is nonintra (0), the first input 64 is passed through to the output 70. However, if the select line 68 is DC (1), indicating the DCT coefficient has frequency zero in both dimensions, the second input 66 is passed through to the output 70.

A second multiplier 74 has a first input 76 operatively coupled to the second

clocked flip-flop, a second input 78 operatively coupled to the scale, and an output 80. The output 80 of the multiplier 74 is shifted right 8 bits by a shifter 82. This is performed to counteract the shift left 4 bits performed during the multiplication, as discussed above. Furthermore, a second shift right 4-bits is required to keep precision to one decimal bit.

5 A third multiplexer 84 has a first input 86 operatively coupled to the shifted output from the second multiplier, a second input 88 operatively coupled to the second clocked-flip-flop 72, a select line 90 operatively coupled to DC and intra, and an output 92 operatively coupled to a third clocked flip-flop 94. If the select line of the third multiplexer 90 indicates that the input data comprises non-intra blocks (e.g., the select line is 0), the first input 86 is passed through to the output 92. However, if the select line 90 indicates that the input data comprises intra blocks and the DCT coefficient has frequency zero in both dimensions (e.g., the select line is 1), the second input 88 is passed through to the output 92.

15 A comparator 96 has an input operatively coupled to the third clocked flip-flop 94. The comparator 96 determines whether the output 92 of the third multiplexer, or data, is greater than 2047 or less than -2048, for the 13 bit data in saturation mode.

20 A fourth multiplexer 98 has a first input 100 operatively coupled to -2048, a second input 102 operatively coupled to 2047, a third input 104 operatively coupled to the output of the third clocked flip-flop 94, a select line 106 operatively coupled to the comparator 96, and an output 108. If the comparator 96 determines that the output of

the third multiplexer 92 is within the range -2048 through 2047, the third input 104 is passed through to the output 108. If the data is less than -2048, the first input 100 is passed through to the output 108. However, if the data is greater than 2047, the second input 102 is passed through to the output 108.

5           A second adder 110 having a first input 112 operatively coupled to the output 108 of the fourth multiplexer 98 and a second input 114 operatively coupled to the sign of the fourth multiplexer 98 output produces an output to a fourth clocked flip-flop 116. The contents of the fourth clocked flip-flop 116 are then written to either the first or second memory 118. Each non-zero IDCT coefficient is multiplied by the scale and the  
10           corresponding element of the modified standard quantization matrix. Thus, after dequantization is completed for a block of data, the dequantization output data is stored in either the first or second memory. Although the circuit is configured in the described manner, one of ordinary skill in the art will appreciate that alternative configurations are possible.

## 15    IDCT

          The standard IDCT method requires numerous additions and multiplications, and therefore is extremely time-consuming. A need exists in the prior art for a method and apparatus which minimizes the operations required in this process. According to a presently preferred embodiment of the present invention, this may be accomplished  
20           through the use of software according to a method derived as follows. The standard formula is converted to a one-dimensional formula:



$f(y,x) = 1/4 \sum C(v) \cos((2y+1)v\pi/16) \sum C(u) \cos((2x+1)u\pi/16) F(u,v)$ , where  $x, y, u, v$  are integers from  $\{0,1,2,3,4,5,6,7\}$ .

This formula is converted to matrix form  $4X = UYU^t$  where  $Y$  is the command queue IDCT output data, and  $U$  is defined by the following matrix:

5 C4, C1, C2, C3, C4, C5, C6, C7  
 C4, C3, C6, -C7, -C4, -C1, -C2, -C5  
 C4, C5, -C6, -C1, -C4, C7, C2, C3  
 C4, C7, -C2, -C5, C4, C3, -C6, -C1  
 C4, -C7, -C2, C5, C4, -C3, -C6, C1  
 10 C4, -C5, -C6, C1, -C4, -C7, C2, -C3  
 C4, -C3, C6, C7, -C4, C1, -C2, C5  
 C4, -C1, C2, -C3, C4, -C5, C6, -C7

where  $C_i = \cos(i\pi/16)$ , where  $i = 0, 1, 2, 3, 4, 5, 6, 7$

15 Through decomposition of the  $U$  matrix into  $F^*D$ , this formula can then be converted to the following formula:

$$4X = FDYD^t F^t$$

where  $F$  is the following scaled matrix:

1,	1,	1,	1,	1,	1,	1,	1
1,	-1 + 2C2,	-1 + 2C4,	-1 + 2C6,	-1,	-1 - 2C6,	-1 - 2C4,	-1 - 2C2

$$\begin{array}{ccccccc}
1, & 1+2C4-2C2, & 1-2C4, & 1-2C4-2C6, & -1, & 1-2C4+2C6, & 1+2C4, & 1+2C4+2C2 \\
1, & -1-2C4+4C2C4, & -1, & -1+2C4-4C6C4, & 1, & -1+2C4+4C6C4, & -1, & -1-2C4-4C2C4 \\
1, & 1+2C4-4C2C4, & -1, & 1-2C4+4C6C4, & 1, & 1-2C4-4C6C4, & -1, & 1+2C4+4C2C4 \\
1, & -1-2C4+2C2, & 1-2C4, & -1+2C4+2C6, & -1, & -1+2C4-2C6, & 1+2C4, & -1-2C4-2C2 \\
5 & 1, & 1-2C2, & -1+2C4, & 1-2C6, & -1, & 1+2C6, & -1-2C4, & 1+2C2 \\
1, & -1, & 1, & -1, & 1, & -1, & 1, & -1
\end{array}$$

and where D is the following diagonal cosine matrix:

$$\begin{array}{cccccccc}
C4, & 0, & 0, & 0, & 0, & 0, & 0, & 0 \\
0, & C1, & 0, & 0, & 0, & 0, & 0, & 0 \\
0, & 0, & C2, & 0, & 0, & 0, & 0, & 0 \\
0, & 0, & 0, & C3, & 0, & 0, & 0, & 0 \\
0, & 0, & 0, & 0, & C4, & 0, & 0, & 0 \\
0, & 0, & 0, & 0, & 0, & C5, & 0, & 0 \\
0, & 0, & 0, & 0, & 0, & 0, & C6, & 0 \\
0, & 0, & 0, & 0, & 0, & 0, & 0, & C7
\end{array}$$

Since D is a diagonal matrix, this reduces the number of operations required where zeros are ignored. Furthermore, scaled matrix F contains only 3 constants, C2, C4, and C6.

Therefore, the present invention reduces the number of constants from 7 to 3.

Typically, the cosine matrix  $DD^t$  is then multiplied by the Y matrix, the F matrix,

and the  $F^t$  matrix. However, since the cosine matrix and the standard quantization matrix have been combined in a previous step, the cosine matrix is not multiplied during the IDCT process. The IDCT butterfly operations corresponding to the matrix X can then be derived. Since F has only 3 constants, this minimizes the number of multiplications and additions performed. Moreover, since the resulting matrix is

symmetric, the corresponding hardware implementation is improved, since gates are decreased and performance is increased.

Referring now to FIG. 3, the IDCT data path according to a presently preferred embodiment of the present invention is shown. A ROM 120 stores microinstructions for controlling the IDCT block control and data lines depending upon which one of seven states, or clock cycles, the IDCT block is in. Instructions are selected by a computer operating under program control 122. Depending upon the microinstruction, a portion of the dequantization output data is read from the first or second memory. The IDCT process uses a pipelining technique. According to a presently preferred embodiment of the present invention, the IDCT block performs column computations first, then stores intermediate data in the first memory or the second memory. The final IDCT data is stored in the third memory, or can be sent directly to the Motion Compensation block. The first or second memory is simultaneously reset to zero. The pipeline comprises four stages, each stage comprising one clock cycle. In a first stage, instructions are fetched from the ROM 120 and a first clocked flip-flop 124 is used for a system reset. In a second stage, the instructions are decoded and data is read from the first or second memory 126. Computing and storing are done at stage 3 and stage 4. Final IDCT data is stored in the third memory at stage 4.

The input data to the IDCT process is an 8x8 matrix. Each row or column of data comprises 8 input data,  $din_0$ ,  $din_1$ ,  $din_2$ ,  $din_3$ ,  $din_4$ ,  $din_5$ ,  $din_6$ , and  $din_7$ . Both the first and second memory comprise two write ports comprising  $datain\_a$  128 and  $datain\_b$

130, controlled by addresses w\_addra 132 and w\_addrb 134. The first and second memories further include two read ports comprising data\_a 136 and data\_b 138, controlled by addresses r\_addra 140 and r\_addrb 142. The read port data\_a 136 feeds a second clocked flip-flop 144 and the read port data\_b 138 feeds a third clocked flip-flop 146, producing outputs data\_a 148 and data\_b 150. According to a presently preferred embodiment, each column of data is processed, then each row of data is processed, according to the butterfly calculations. For example, if the read ports data\_a 136 and data\_b 138 comprise din0 and din4, the corresponding values are obtained for the appropriate column or row of dequantization data stored in the first or second memory.

The IDCT butterfly calculations are performed for each of 64 data of the 8 x 8 block, and therefore require  $(7 \times 8) + (7 \times 8) = 112$  clock cycles to process one block of data. These formulas are as follows:

1.  $s3 = \text{din}3 + \text{din}5$   
 $t3 = \text{din}3 - \text{din}5$   
 $z3 = t3 * c3 - s3$
2.  $s1 = \text{din}1 + \text{din}7$   
 $t1 = \text{din}1 - \text{din}7$   
 $z1 = t1 * c1 - s1$
3.  $s2 = \text{din}2 + \text{din}6$   
 $t2 = \text{din}2 - \text{din}6$   
 $z2 = t2 * c2 - s2$   
 $x3 = s1 + s3$   
 $t4 = s1 - s3$
4.  $s5 = \text{din}0 + \text{din}4$   
 $s4 = \text{din}0 - \text{din}4$   
 $x7 = z1 + z3$   
 $t5 = z1 - z3$

$$x8 = t5 * c2 - 0$$

$$temp2 = x8 - x3 = t5 * c2 - x3$$

$$5. \quad \begin{aligned} x1 &= s5 + s2 \\ x2 &= s5 - s2 \\ x5 &= s4 + z2 \\ x6 &= s4 - z2 \\ x4 &= t4 * c2 - 0 \\ temp1 &= x4 - x7 = t4 * c2 - x7 \end{aligned}$$

$$10 \quad 6. \quad \begin{aligned} dout0 &= x1 + x3 \\ dout3 &= x2 + temp2 \\ dout7 &= x1 - x3 \\ dout4 &= x2 - temp2 \end{aligned}$$

$$15 \quad 7. \quad \begin{aligned} dout2 &= x6 + temp1 \\ dout1 &= x5 + x7 \\ dout5 &= x6 - temp1 \\ dout6 &= x5 - x7 \end{aligned}$$

Butterfly constants:

$$20 \quad \begin{aligned} c1 &= 1 \ 1101 \ 1001 \\ c2 &= 1 \ 0110 \ 1010 \\ c3 &= 0 \ 1100 \ 0100 \end{aligned}$$

Referring now to FIG. 4, an IDCT data path according to a presently preferred embodiment of the present invention is shown. More particularly, stages 3 and 4, comprising the butterfly calculations, are shown. Although the circuit is configured in the following manner, those of ordinary skill in the art will appreciate that alternative configurations are possible.

According to a presently preferred embodiment of the present invention, the IDCT block uses two adders, two subtractors, and one multiplier and accumulator

(MAC), each of which operate at one clock cycle. However, one of ordinary skill in the art will readily recognize that an adder, subtractor, or multiplier may be implemented with various circuitry.

According to a presently preferred embodiment of the present invention, the IDCT data path comprises a first 152, second 154, third 156, and fourth 158 multiplexer. Each of the multiplexers comprises a first data input, a second data input, a third data input, a fourth data input, a select line, and an output. According to a presently preferred embodiment of the present invention, the select lines 160 for the first, second, third, and fourth multiplexers are identical, and may be operatively coupled to each other. One of ordinary skill in the art, therefore, will readily recognize that the inputs to each multiplexer may be interchanged while preserving the butterfly calculations.

According to a presently preferred embodiment of the present invention, the first data input 162 of the first multiplexer is memory output data\_a 148, the second data input 164 of the first multiplexer is s5, the third data input 166 of the first multiplexer is x6, and the fourth data input 168 of the first multiplexer is x1. Similarly, the first data input 170 of the second multiplexer is memory output data\_b 150, the second data input 172 of the second multiplexer is s2, the third data input 174 of the second multiplexer is temp1, and the fourth data input 176 of the second multiplexer is x3. In addition, the first data input 178 of the third multiplexer is memory output data\_a 148, the second data input 180 of the third multiplexer is s5, the third data input 182 of the third multiplexer is x6, and the fourth data input 184 of the third multiplexer is x1. Finally, the

first data input 186 of the fourth multiplexer is memory output data\_b 150, the second data input 188 of the fourth multiplexer is s2, the third data input 190 of the fourth multiplexer is temp1, and the fourth data input 192 of the fourth multiplexer is x3. The data inputs d\_a 162, 178 and d\_b 170, 186 of the first 152, second 154, third 156 and fourth 158 multiplexers are operatively coupled to the first and second memory via one of outputs 148, 150.

According to a presently preferred embodiment of the present invention, the IDCT block comprises two adders, two subtractors, a multiplier and accumulator (MAC), a shifter, and a means for truncating final IDCT data. A first subtractor 194 has a first input 196 operatively coupled to the third multiplexer output, a second input 198 operatively coupled to the fourth multiplexer output, and an output. The output is operatively coupled to a fourth clocked flip-flop 200. For example, to calculate  $x_2 = s_5 - s_2$ , the second inputs of the third and fourth multiplexers 156, 158 are selected, and the output  $x_2$  is operatively coupled to the fourth clocked flip-flop 200.

A first adder 202 has a first input 204 operatively coupled to the first multiplexer output, a second input 206 operatively coupled to the second multiplexer output, and an output. The output of the adder is operatively coupled to a fifth clocked flip-flop 208, which is further operatively coupled to a shifter 210, since each time multiplication by a cosine constant is required, a shift left 8-bits must be performed to align the decimal points. In order to minimize memory accesses, the output of the fifth flip-flop 208 is stored in a register 212. For example,  $s_3$  and  $s_2$  are each stored in a separate register.

When the second data inputs of the first and second multiplexers 152, 154 are selected, x1 is calculated to be the sum of s2 and s5. Value x1 is then forwarded for use by the next operation

The outputs of the first adder 202 and first subtractor 194 are operatively coupled to first 214 and second inputs 216, respectively, of a truncate data block 218. The truncate data block further includes a third SCALE\_ENB input 220. The SCALE\_ENB input 220 is a scale enable signal which enables the truncate data block 218 during row calculations, and disables the truncate data block 218 during column calculations. One of ordinary skill in the art, however, will readily recognize that the row and column calculations could be performed in the reverse order. The truncate data block 218 has five outputs: idct\_write 222, w\_addra 224 corresponding to w\_addra 132 of FIG. 3, and w\_addrb 225 corresponding to w\_addrb 134 of FIG. 3, idct\_a 226, and idct\_b 228 operatively coupled to the motion compensation block. According to a presently preferred embodiment of the present invention, two idct row calculations are simultaneously processed by the truncate data block 218, and output through idct\_a 226 and idct\_b 228. These two values are written to an address indicated by w\_addra 224 and w\_addrb 225 when indicated by idct\_write 222. After each column of data is processed, the intermediate IDCT data is written to either the first or second memory. However, once the final row calculations are completed, the truncate data block 218 truncates the data prior to outputting the final IDCT data to the motion compensation block. The truncate data block 218 truncates the data to 9 bit IDCT data in saturation mode, allowing data values -256 through 255 to be output.



The IDCT data path further comprises a fifth 230, sixth 232, seventh 234, and eighth 236 multiplexer. Each of the multiplexers comprises a first data input, a second data input, a third data input, a fourth data input, a fifth data input, a select line, and an output. The data inputs of the fifth, sixth, seventh, and eighth multiplexers are

5 operatively coupled to the data from the previous calculation results, such as  $s1 = \text{din1} + \text{din7}$  from the output of the first adder 208. According to a presently preferred embodiment of the present invention, the select lines 238 for the fifth, sixth, seventh, and eighth multiplexers are identical, and may be operatively coupled to each other. One of ordinary skill in the art, therefore, will readily recognize that the inputs to each

10 multiplexer may be interchanged while preserving the butterfly calculations.

According to a presently preferred embodiment of the present invention, the first data input 240 of the fifth multiplexer is  $s1$ , the second data input 242 of the fifth multiplexer is  $z1$ , the third data input 244 of the fifth multiplexer is  $s4$ , the fourth data input 246 of the fifth multiplexer is  $x2$ , and the fifth data input 248 of the fifth

15 multiplexer is  $x5$ . Similarly, the first data input 250 of the sixth multiplexer is  $s3$ , the second data input 252 of the sixth multiplexer is  $z3$ , the third data input 254 of the sixth multiplexer is  $z2$ , the fourth data input 256 of the sixth multiplexer is  $\text{tmp2}$ , and the fifth data input 258 of the sixth multiplexer is  $x7$ . In addition, the first data input 260 of the seventh multiplexer is  $s1$ , the second data input 262 of the seventh multiplexer is  $z1$ , the

20 third data input 264 of the seventh multiplexer is  $s4$ , the fourth data input 266 of the seventh multiplexer is  $x2$ , and the fifth data input 268 of the seventh multiplexer is  $x5$ .

Finally, the first data input 270 of the eighth multiplexer is s3, the second data input 272 of the eighth multiplexer is z3, the third data input 274 of the eighth multiplexer is z2, the fourth data input 276 of the eighth multiplexer is tmp2, and the fifth data input 278 of the eighth multiplexer is x7.

5           A second subtractor 280 has a first input 282 operatively coupled to the seventh multiplexer output, a second input 284 operatively coupled to the eighth multiplexer output, and an output. The output is operatively coupled to a sixth clocked flip-flop 286. In order to minimize memory accesses, the output is stored in a register 288. Therefore, t4 and x6 are each stored in a separate register.

10           A second adder 290 has a first input 292 operatively coupled to the fifth multiplexer output, a second input 294 operatively coupled to the sixth multiplexer output, and an output. The output of the adder is operatively coupled to a seventh clocked flip-flop 296, which is further operatively coupled to a shifter 298, since each time multiplication by a cosine constant is required, a shift left 8-bits must be performed  
15 to align the decimal points. In order to minimize memory accesses, the output is stored in a register 300. For example, x3, x7, and x5 are each stored in a separate register.

20           A multiplier and accumulator (MAC) 302 having a subtractor has a first port 304, a second port 306, a third port 308, and an output 310. The first port 304 is operatively coupled to an output of a ninth multiplexer 312 having a first input 314 operatively coupled to t4, a second input 316 operatively coupled to the output of the first

subtractor, or fourth clocked flip-flop, and a third input 318 operatively coupled to the  
 output of the second subtractor, or sixth clocked flip-flop. The second port 306 is  
 operatively coupled to an output of a tenth multiplexer 320 having a first input 322  
 operatively coupled to butterfly constant C1, a second input 324 operatively coupled to  
 butterfly constant C2 and a third input 326 operatively coupled to butterfly constant  
 C3. Select line 328 is adapted for selecting butterfly constant C1, C2 or C3 according  
 to the butterfly calculations set forth above. The third port 308 is operatively coupled  
 to an output of an eleventh multiplexer 330, the eleventh multiplexer 330 having a first  
 input 332 operatively coupled to the output of the shifter 298, a second input 334  
 operatively coupled to x3, and a third input 336 operatively coupled to x7. Select lines  
 338, 340 to the ninth 312 and eleventh 330 multiplexers are coordinated with the  
 multiplexer data inputs to produce the butterfly calculations as set forth above. The  
 MAC 302 multiplies the value at the first port 304 and the value at the second port 306,  
 and subtracts the value at the third port 308. The output of the MAC 302, i.e., z1, z2, z3,  
 or tmp1, is then written to a memory location, such as register 342. These output values  
 may each be stored in a separate register. Alternatively, values may be stored in the  
 same location if they are used at different times, ensuring that results are not overwritten.

The outputs of the second adder 290 and second subtractor 280 are operatively  
 coupled to the truncate data block 218. After each column of data is processed, the  
 intermediate IDCT data is written to either the first or second memory. However, once  
 the final row calculations are completed, the truncate data block truncates the data prior  
 to outputting the final IDCT data to the motion compensation block. The truncate data

block truncates the final data to 9 bit IDCT data in saturation mode, allowing data values -256-255 to be output. Upon completion of processing by the IDCT block, each row of final IDCT data is written to the third memory for use by the motion compensation block.

5           The hardware implementation for the IDCT block minimizes the number of clock cycles required. For a resolution of 640 x 480, the number of macroblocks processed by an MPEG-II decoder is  $640/16 \times 480/16 = 1200$ . Thus, for a macroblock having a 4:2:0 format, the number of blocks processed by the IDCT block is  $1200 \times 6 = 7200$ . One of ordinary skill in the art will readily recognize that alternative chroma formats are possible. For example, a 4:2:2 chroma format would require that  $1200 \times 8 = 9600$  blocks be processed. Since it takes 7 clock cycles to process one row of data,  $7 \times (8 + 8) = 112$  clocks are required to process one  $8 \times 8$  block. Therefore,  $112 \times 7200 = 0.8064$  Mclocks are required to process one frame. With a 10% overhead to move data in or out, a  $0.1 \times 0.8064 \text{ Mclks} = 0.08064 \text{ Mclks}$  pipeline stall results. Therefore, the speed of the IDCT calculations according to the present invention is  $(0.8064 + 0.08064) \times 30 = 26.6 \text{ Mclks}$  for a 30 frame per second motion picture quality.

While embodiments and applications of this invention have been shown and described, it would be apparent to those skilled in the art that many more modifications than mentioned above are possible without departing from the inventive concepts herein. The invention, therefore, is not to be restricted except in the spirit of the appended claim.

What is Claimed is:

1. An apparatus for performing dequantization of an encoded video data stream, comprising:

means for receiving a quantization matrix corresponding to the encoded video

5 data stream;

means for receiving a scale representing a compression ratio of the encoded video data stream;

means for receiving non-zero IDCT coefficient matrix corresponding to a block of the encoded video data;

10 means for multiplying a diagonal cosine matrix and the standard quantization matrix to create a modified standard quantization matrix; and

means for multiplying the scale, the non-zero IDCT coefficient matrix and the modified standard quantization matrix.

15 2. An apparatus for performing dequantization of an encoded video data stream, comprising:

means for receiving a modified standard quantization matrix, the modified standard quantization matrix being a product of a standard quantization matrix corresponding to the encoded video data stream and a diagonal cosine matrix.

20 means for receiving a scale representing a compression ratio of the encoded video data stream;

means for receiving non-zero IDCT coefficient matrix corresponding to a block of the encoded video data;

means for multiplying the scale, the non-zero IDCT coefficient matrix and the modified standard quantization matrix.

- 5     3.     A method for performing dequantization of an encoded video data stream, comprising the following steps:

receiving a quantization matrix corresponding to the encoded video data stream;

receiving a scale representing a compression ratio of the encoded video data stream;

10     receiving non-zero IDCT coefficient matrix corresponding to a block of the encoded video data;

multiplying a diagonal cosine matrix and the standard quantization matrix to create a modified standard quantization matrix; and

15     multiplying the scale, the non-zero IDCT coefficient matrix and the modified standard quantization matrix.

4.     A method for performing dequantization of an encoded video data stream, comprising:

receiving a modified standard quantization matrix, the modified standard quantization matrix being a product of a standard quantization matrix corresponding to the encoded video data stream and a diagonal cosine matrix.

20

receiving a scale representing a compression ratio of the encoded video data stream;

receiving non-zero IDCT coefficient matrix corresponding to a block of the encoded video data;

- 5 multiplying the scale, the non-zero IDCT coefficient matrix and the modified standard quantization matrix.

5. An apparatus for performing IDCT on dequantization video signal data, comprising:

means for performing IDCT row calculations on the dequantization video signal data without multiplying the dequantization video signal data by a diagonal cosine matrix; and

means for performing IDCT column calculations on the dequantization video signal data without multiplying the dequantization video signal data by a diagonal cosine matrix.

- 15 6. An apparatus for performing IDCT on dequantization video signal data, comprising:

a first IDCT block for performing IDCT calculations; and

a second IDCT block for performing IDCT calculations.

7. The apparatus according to claim 6, wherein the first and second IDCT block





input, a fourth data input, a select line, and an output; and

a subtractor having a first input operatively coupled to the third multiplexer output, a second input operatively coupled to the fourth multiplexer output, and an output.

- 5 10. A method for performing IDCT calculations on dequantization video signal data, the method comprising the following steps:

performing IDCT row calculations on the dequantization video signal data; and

performing IDCT column calculations on the dequantization video signal data,

wherein the steps of performing IDCT row and column calculations include a plurality of  
10 stages of calculations.

11. The method according to claim 10, wherein a first one of the plurality of stages includes the following sub-steps:

receiving a third dequantization output value in the sequence of dequantization output values;

- 15 receiving a fifth dequantization output value in the sequence of dequantization output values;

adding the third dequantization output value and the fifth dequantization output value to produce a third sum;

- 20 subtracting the fifth dequantization output value from the third dequantization output value to produce a third difference;

multiplying the third difference by a third butterfly constant to produce a third product; and

subtracting the third sum from the third product to produce a third value.

12. The method according to claim 11, wherein a second one of the plurality of stages  
5 includes the following sub-steps:

receiving a first dequantization output value in a sequence of dequantization  
output values;

receiving a seventh dequantization output value in the sequence of  
dequantization output values;

10 adding the first dequantization output value and the seventh dequantization  
output value to produce a first sum;

subtracting the seventh dequantization output value from the first dequantization  
output value to produce a first difference;

15 multiplying the first difference by a first butterfly constant to produce a first  
product; and

subtracting the first sum from the first product to produce a first value.

13. The method according to claim 12, wherein a third one of the plurality of stages  
includes the following sub-steps:

20 receiving a second dequantization output value in the sequence of

dequantization output values;

receiving a sixth dequantization output value in the sequence of dequantization output values;

5 adding the second dequantization output value and the sixth dequantization output value to produce a second sum;

subtracting the sixth dequantization output value from the second dequantization output value to produce a second difference;

10 multiplying the second difference by a second butterfly constant to produce a second product;

subtracting the second sum from the second product to produce a second value;

adding the first sum and the third sum to produce a third intermediate value; and

subtracting the third sum from the first sum to produce a fourth difference.

14. The method according to claim 13, wherein a fourth one of the plurality of stages includes the following sub-steps:

15 receiving a zeroth dequantization output value in the sequence of dequantization output values;

receiving a fourth dequantization output value in the sequence of dequantization output values;

20 adding the zeroth dequantization output value and the fourth dequantization output value to produce a fifth sum;

subtracting the fourth dequantization output value from the zeroth dequantization output value to produce a fourth sum;

adding the first value and the third value to produce a seventh intermediate value;

subtracting the third value from the first value to produce a fifth difference;

5 multiplying the fifth difference and a second butterfly constant to produce an eighth intermediate value; and

subtracting the third intermediate value from the eighth intermediate value to produce a second temporary value.

15. The method according to claim 14, wherein a fifth one of the plurality of stages includes the following sub-steps:

adding the fifth sum and the second sum to produce a first intermediate value;

subtracting the second sum from the fifth sum to produce a second intermediate value;

adding the fourth sum and the second value to produce a fifth intermediate value;

15 subtracting the second value from the fourth sum to produce a sixth intermediate value;

multiplying the fourth difference and the second butterfly constant to produce a fourth intermediate value; and

20 subtracting the seventh intermediate value from the fourth intermediate value to produce a first temporary value.

16. The method according to claim 15, wherein a sixth one of the plurality of stages

includes the following sub-steps:

adding the first intermediate value and the third intermediate value to produce a zeroth output value;

5 adding the second intermediate value and the second temporary value to produce a third output value;

subtracting the third intermediate value from the first intermediate value to produce a seventh output value; and

subtracting the second temporary value from the second intermediate value to produce a fourth output value.

10 17. The method according to claim 16, wherein a seventh one of the plurality of stages includes the following sub-steps:

adding the sixth intermediate value and the first temporary value to produce a second output value;

15 adding the fifth intermediate value and the seventh intermediate value to produce a first output value;

subtracting the first temporary value from the sixth intermediate value to produce a fifth output value; and

subtracting the seventh intermediate value from the fifth intermediate value to produce a sixth output value.

20 18. In a video decoder, an apparatus for performing dequantization and IDCT calculations in parallel, comprising:

a dequantization block capable of performing dequantization calculations on a block of encoded video signal data using a modified standard quantization matrix, the modified standard quantization matrix being a product of a standard quantization matrix and a diagonal cosine matrix, the dequantization block producing dequantization

5 output data; and

an IDCT block capable of performing IDCT calculations on the dequantization output data.

19. The apparatus according to claim 18, further including:

a command queue block having an input operatively coupled to an encoded  
10 input data stream, the command queue block outputting the block of encoded video signal data corresponding to one block of input data for use by the dequantization block.

20. The apparatus according to claim 18, wherein the block of encoded video signal data includes:

15 a modified standard quantization matrix;

data comprising a plurality of IDCT coefficients corresponding to a block of encoded video signal data;

an index for determining a location of the data within the block; and

a scale indicating an MPEG-II compression ratio for the block of encoded video  
20 signal data.

21. The apparatus according to claim 20, wherein the index transfers only non-zero data.

22. The decoder according to claim 18, wherein the dequantization block and the IDCT block process each block of encoded video signal data in parallel.

5 23. In a video decoder, a method for performing dequantization and IDCT calculations in parallel, comprising:

performing dequantization calculations on a block of encoded video signal data using a modified standard quantization matrix, the modified standard quantization matrix being a product of a standard quantization matrix and a diagonal cosine matrix, the dequantization block producing dequantization output data; and

performing IDCT butterfly calculations on the dequantization output data.

ABSTRACT OF THE DISCLOSURE

A dequantization block is provided for performing dequantization calculations on a block of encoded video signal data using a modified standard quantization matrix.

The modified standard quantization matrix is a product of a standard quantization matrix

5 and a diagonal cosine matrix. The dequantization block receives a modified standard quantization matrix, the modified standard quantization matrix being a product of a

standard quantization matrix corresponding to the encoded video data stream and a

diagonal cosine matrix. In addition the dequantization block receives a scale

representing a compression ratio of the encoded video data stream and non-zero IDCT

10 coefficient matrix corresponding to a block of the encoded video data. The

dequantization block then multiplies the scale, the non-zero IDCT coefficient matrix and

the modified standard quantization matrix. An IDCT block is provided for performing

IDCT calculations on each block processed by the dequantization block. The IDCT

block then performs IDCT column and row calculations on the dequantization video

15 signal data using a pipelining technique.



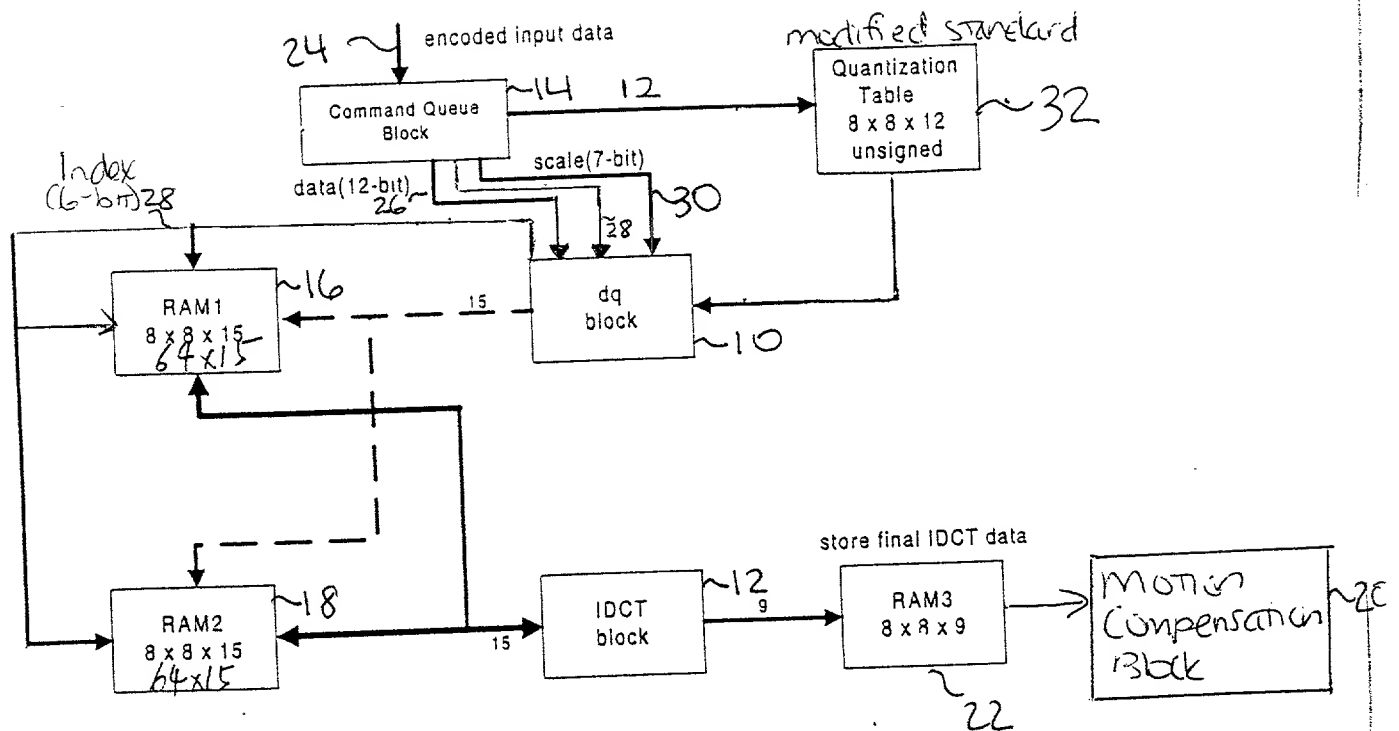


Fig. 1

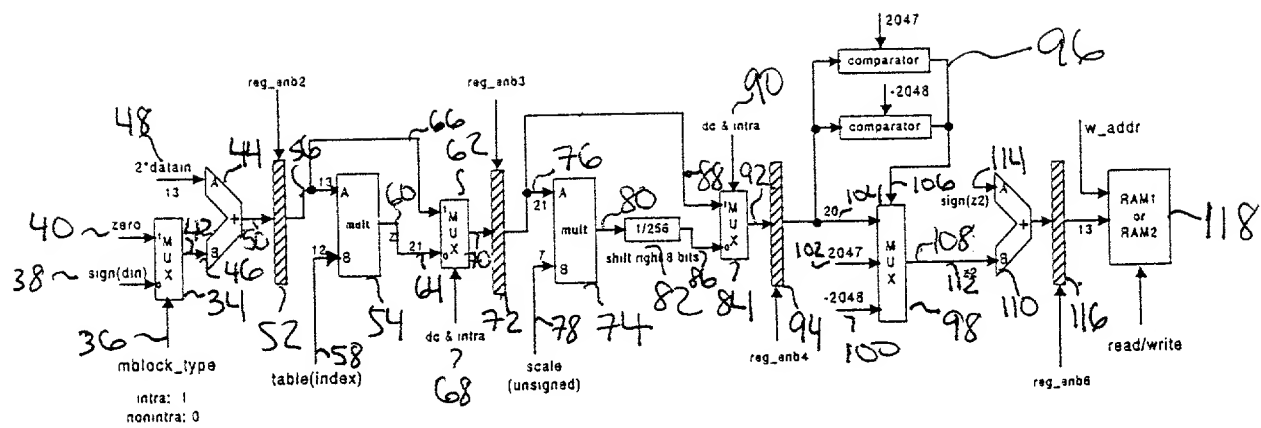


Fig. 2


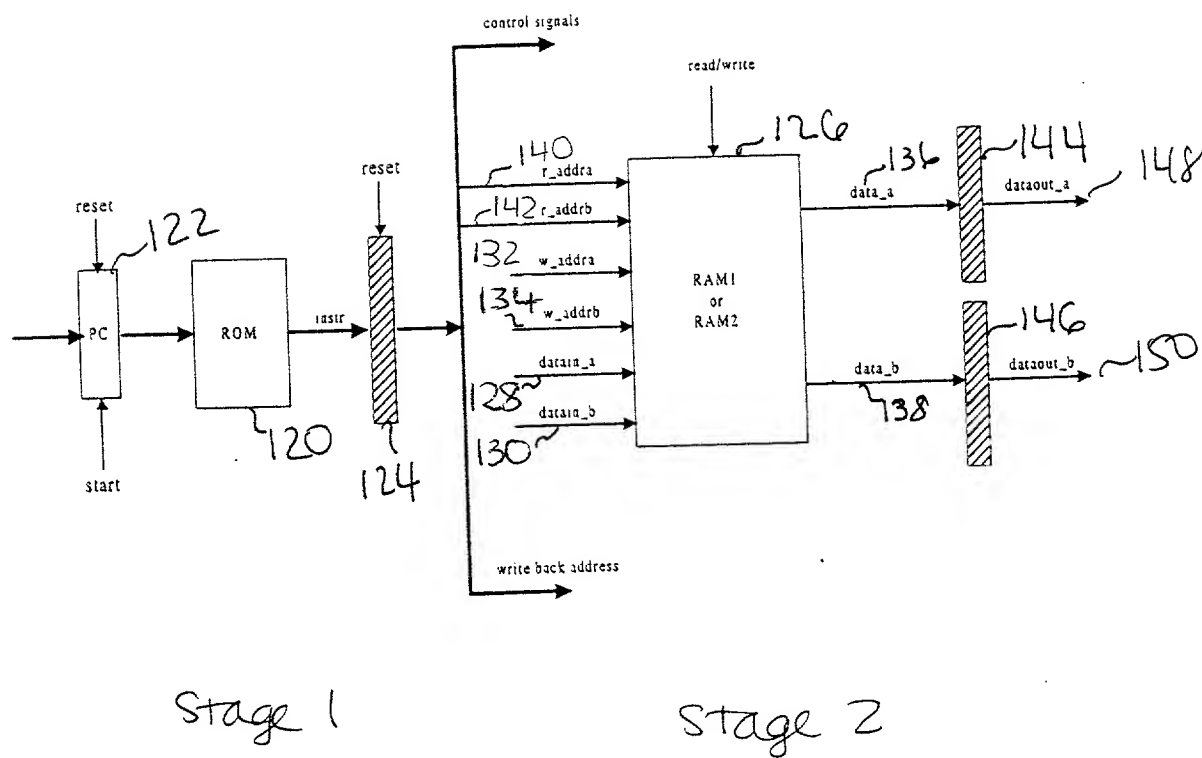



Fig. 3

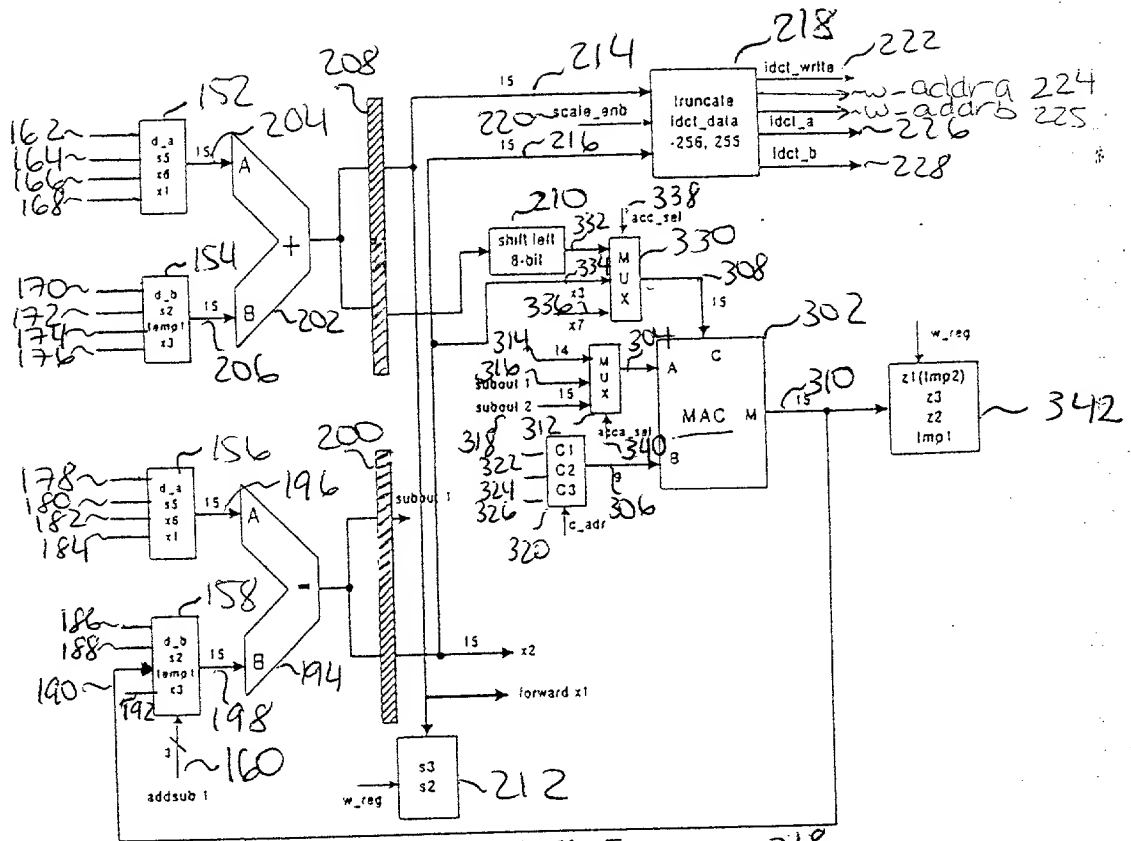


Stage 3

Fig. 4

Stage 4

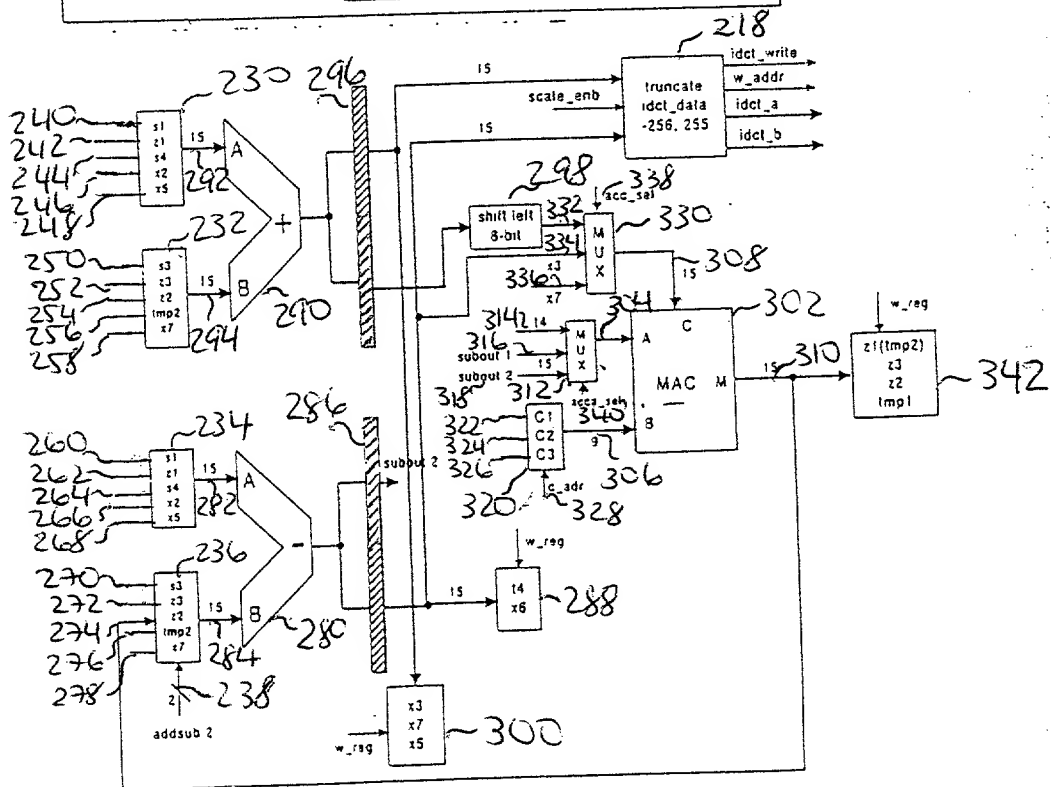

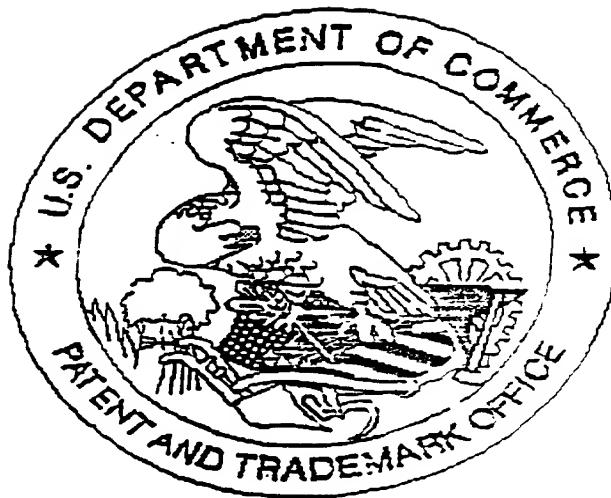

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
  - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages \_\_\_\_\_ do not meet these requirements.
  - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
  - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
  - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
  - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
  - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
  - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
  - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) \_\_\_\_\_ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) \_\_\_\_\_ are missing.
5. OTHER: No Declaration